



T-REX REVENGE™




Keep these instructions for future reference, as they contain important information.

IMPORTANT! FOR BEST PERFORMANCE, CLEAN TRACK BEFORE EACH RACE. SEE OWNER'S MANUAL FOR DETAILS.

CONTENTS

TRACK PIECES					
(B5841JP) (2) 9 in. Lane Changer	(B5830T) (1) 6 in. Straight Track	(B5832TN) (1) 9 in. Straight Terminal	(B5831) (8) 9 in. Radius Curve (1/4 Circle)	(B5846) (4) 9 in. Radius Curve (1/8 Circle)	(B5879XW) (2) Transition
ACCESSORIES		VEHICLES		SUPPORTS	
(B615E) (2) Plug-in Racing Controllers	(B7890) (1) Sandpaper	(B610S) (1) Power Pak	 2 Vehicles	 (2) No. 1 Supports	 (1) No. 7 Support
	(B7936) (1) Billboard Sign Clips (bag of 6)	(B5929) (3) Double Lane Track Clips			

refer to the accompanying Owners Manual for wiring instructions for power pack and for assembly instructions for track, supports and accessory parts.

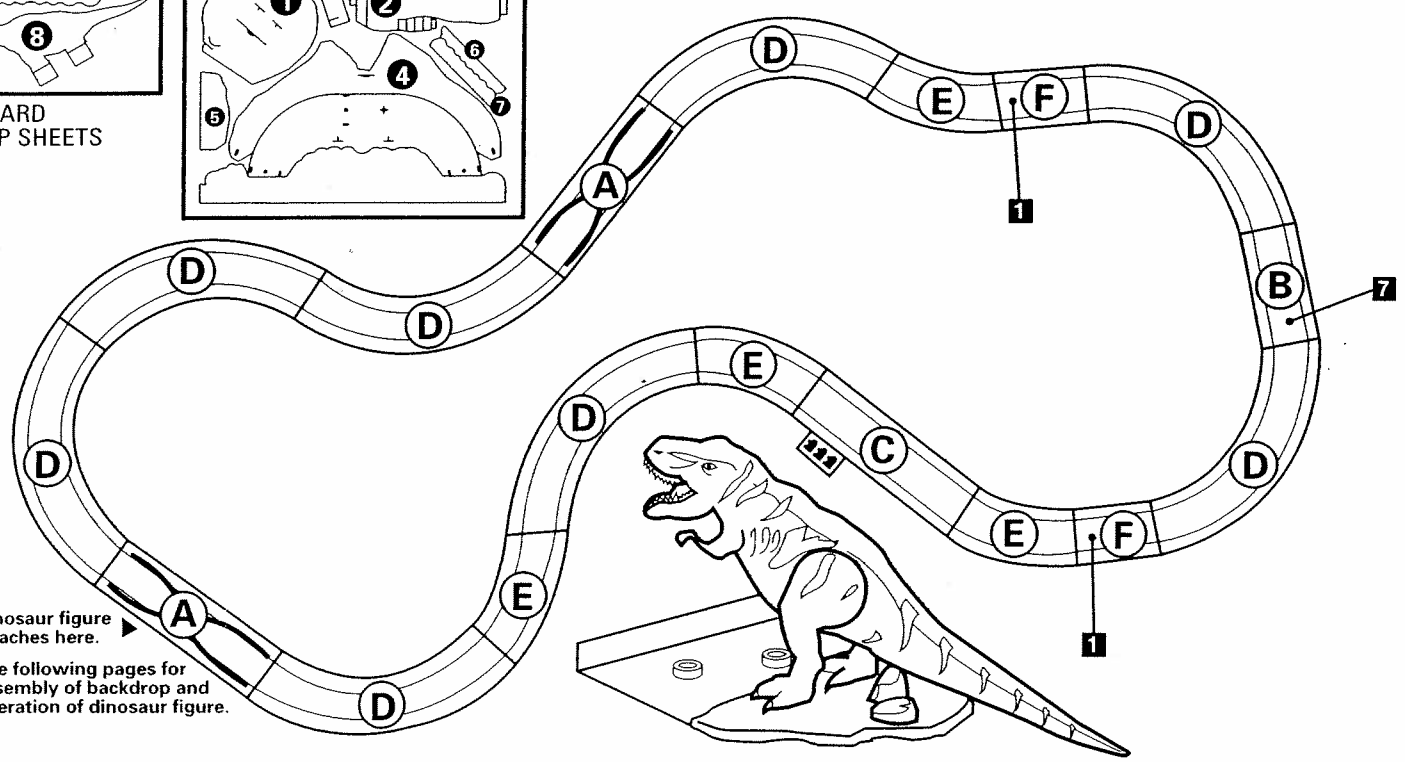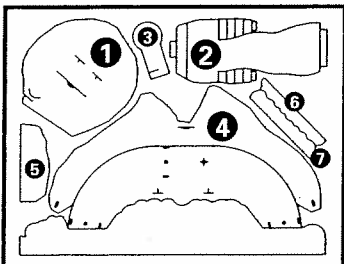
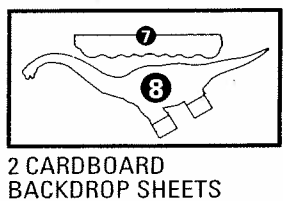


BACKDROP ASSEMBLY

- Insert the tabs on the bottom of Brachiosaurus ⑧ into the two small slots on lake ①. Fold one tab forward and one tab back to secure.


Insert the bottom tab of waterfall ② into the large slot on lake ① and fold back. Insert the top tab into the top slot on mountain ④. Insert the two middle tabs into the t-shaped slots on mountain ④.

- Slide base ③ into the side slot on lake ①. This will be the base for the No. 7 support (see below).

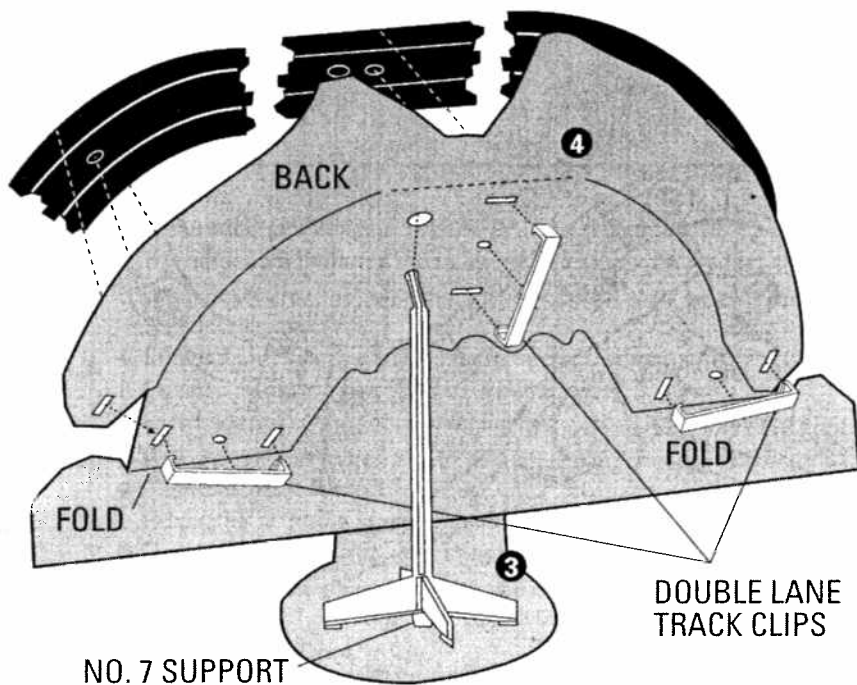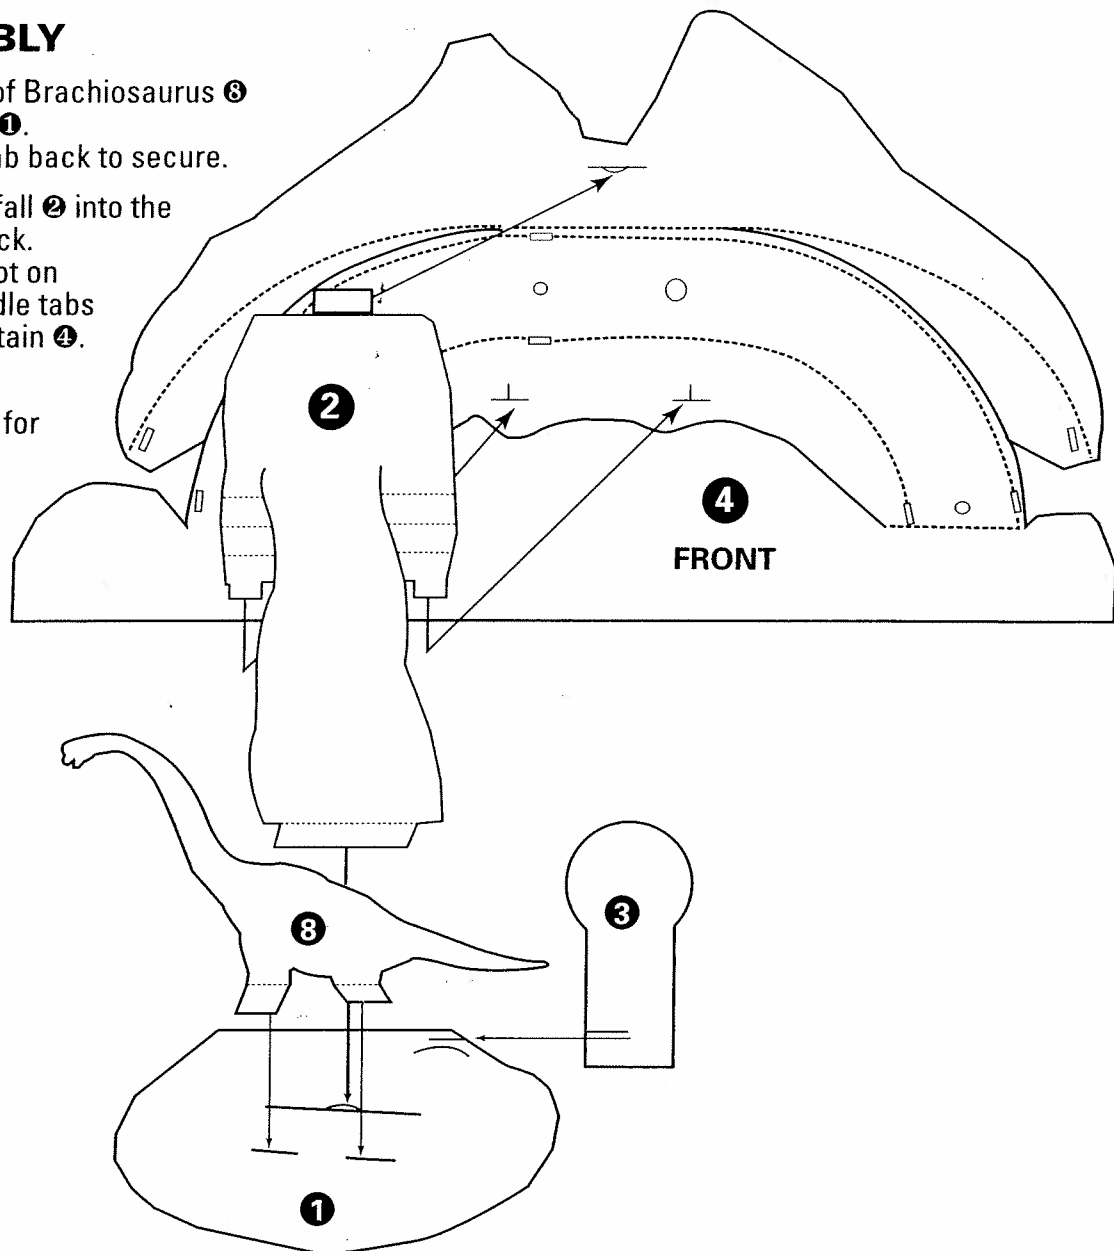


TRACK ASSEMBLY

- Connect track pieces ①, ② and ③ together.
- Connect assembled track pieces to front of mountain ④, starting at center, as shown. Line up hole on track piece ① with corresponding cutout on mountain ④, as shown. Next, press one double lane track clip through the three cutouts and snap it onto track.
- Fold creased sections of mountain ④ forward at top. Fold creased sections back at lower left and right, allowing the lower "rock" section to pop forward. Pull upper-section cutouts down to line up with lower-section cutouts, as shown. Attach remaining double lane track clips.
- Insert No. 7 support through hole in mountain ④ and into hole in track ②, as shown. Stand support on base ③.

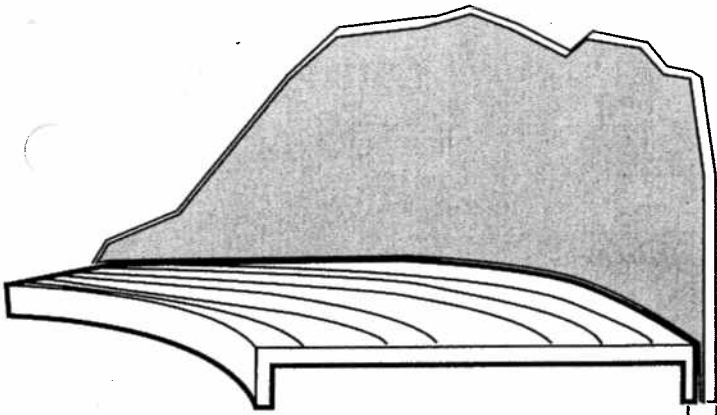

TRACK CLIPS

- Attach scenery pieces ⑤, ⑥ and ⑦ to track with billboard sign clips, as shown.

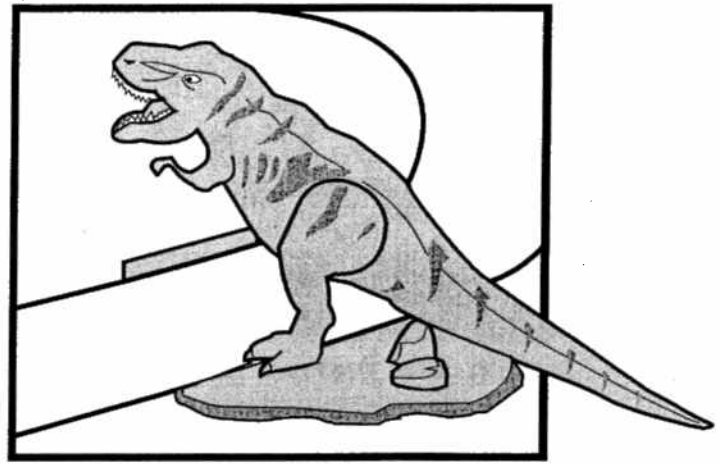


DINOSAUR ASSEMBLY

- Snap 9" lane changer track (A) onto dinosaur figure base.
NOTE: only the special vehicles included with this set will work with the dinosaur figure.



COMPLETED ASSEMBLY

Your completed track layout will look like this.

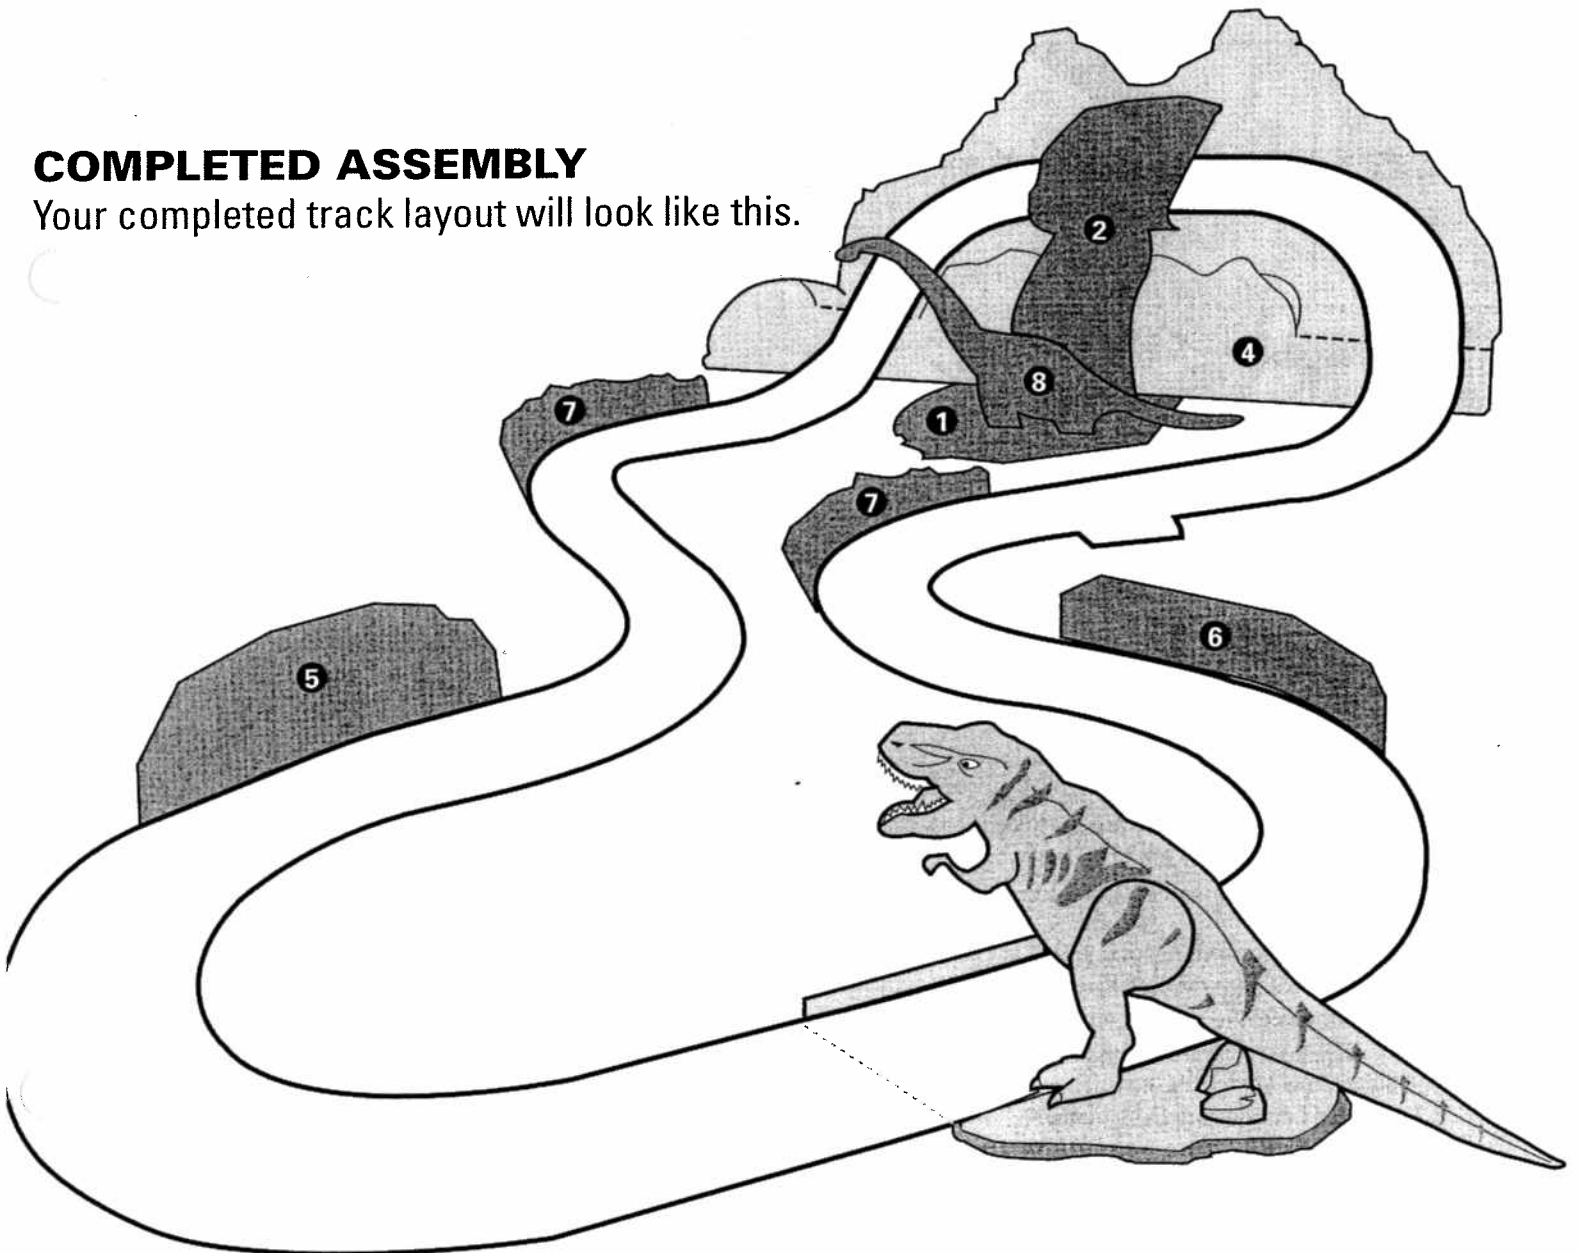

DINOSAUR OPERATION

- To install battery, locate the battery door: under the dinosaur figure's tail, next to the ON/OFF switch.
- Remove the battery door with a Philips screwdriver. Install one AA alkaline battery with its polarity (+) as shown inside battery compartment. Replace battery door and tighten screw.
- To operate: turn switch to ON position. The dinosaur figure will move up and down, and his jaws will open and close...as he attacks the vehicles racing past!

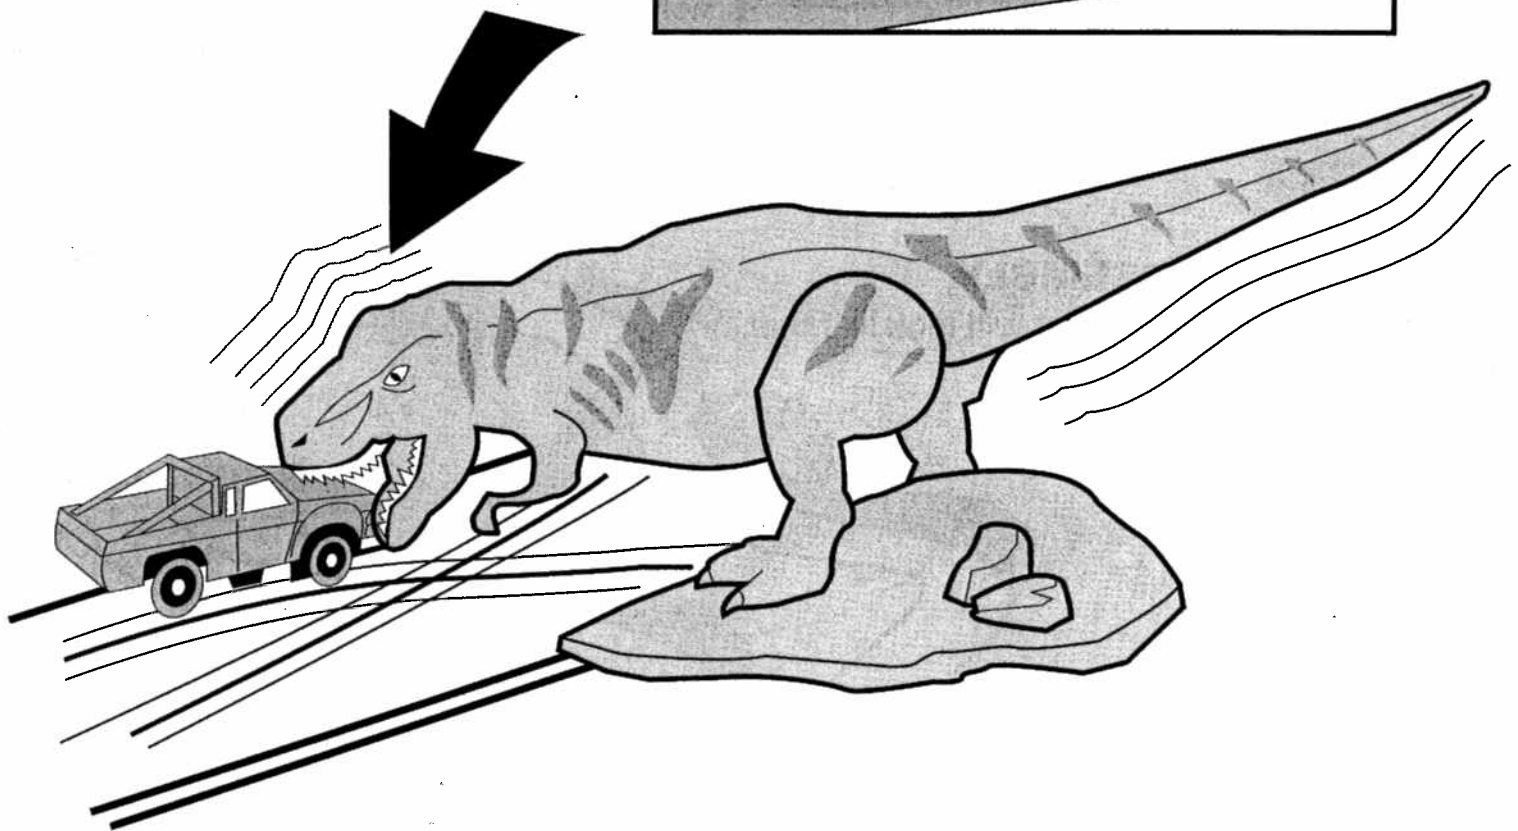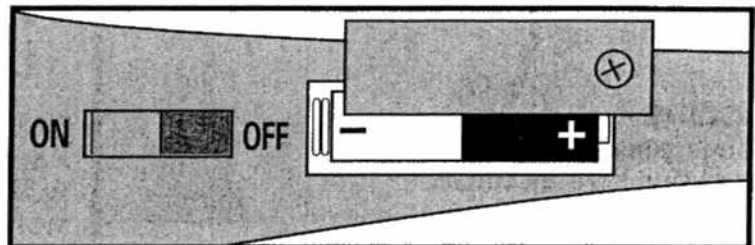

CAUTION:

1. Non-rechargeable batteries are not to be recharged.
2. Rechargeable batteries are to be removed from the product before they are charged.
3. If removable rechargeable batteries are used, they are only to be charged under adult supervision.
4. Do not mix alkaline, standard (carbon-zinc), or rechargeable (nickel-cadmium) batteries.
5. Do not mix old batteries and new batteries.
6. Only batteries of the same or equivalent type as recommended are to be used.
7. Be sure to insert batteries with the correct polarities and always follow the toy and battery manufacturers' instructions.
8. Exhausted batteries are to be removed from the product.
9. The supply terminals are not to be short-circuited.
10. For best performance use alkaline batteries. Battery life may vary depending on battery brand. Toy performance may decrease as batteries weaken.
11. Dispose of batteries safely.