

WARNING

To prevent falls, the seat must be properly attached to the seat tube using the seat peg. The seat peg must be fully inserted into the seat and seat tube. Make sure the end of the seat peg is flush with the seat.


SEAT PEG FLUSH



SEAT PEG NOT PROPERLY ATTACHED



To properly assemble the seat peg, follow these instructions carefully.

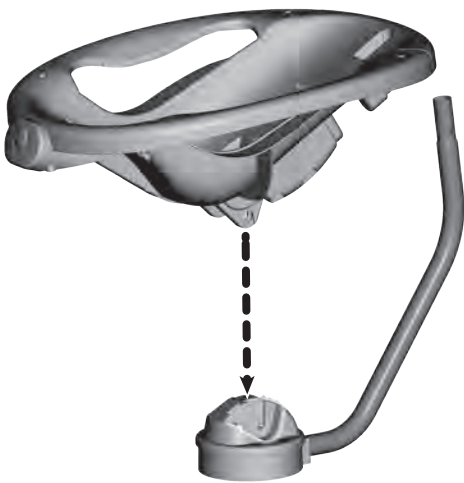

Fit the the seat onto the seat tube.



Push the seat peg completely into the hole in the seat. This may take a lot of force.



When properly assembled, the seat peg will be flush with the seat.