

TECH TRAX

THE ADVANCED CONSTRUCTION SYSTEM FOR ULTIMATE STUNTS



Hot Wheels
COM
Cool cars, games and more!


© 2014 Mattel. All rights reserved. Hot Wheels, Hot Wheels logo, Tech Trax, and the Tech Trax logo are trademarks of Mattel, Inc. in the U.S. and other countries. All other trademarks are the property of their respective owners.



TECH TRAX

THE ADVANCED CONSTRUCTION SYSTEM FOR ULTIMATE STUNTS

FLEX LOOP™ STUNT SET

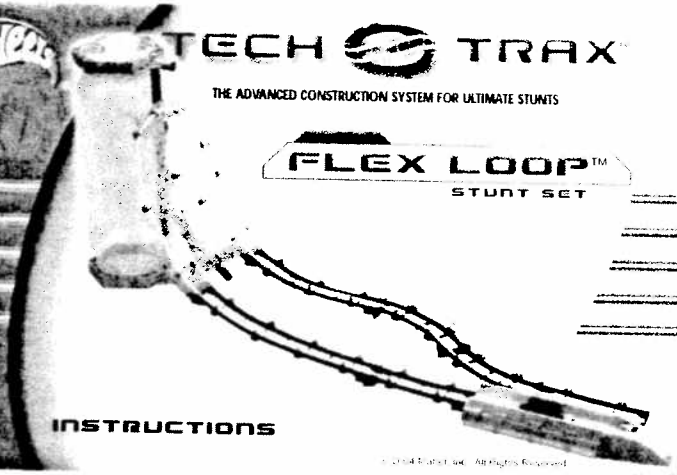


INSTRUCTIONS

© 2014 Mattel, Inc. All rights reserved.

PARTS




TECH TRAX™ BUILDING BASICS

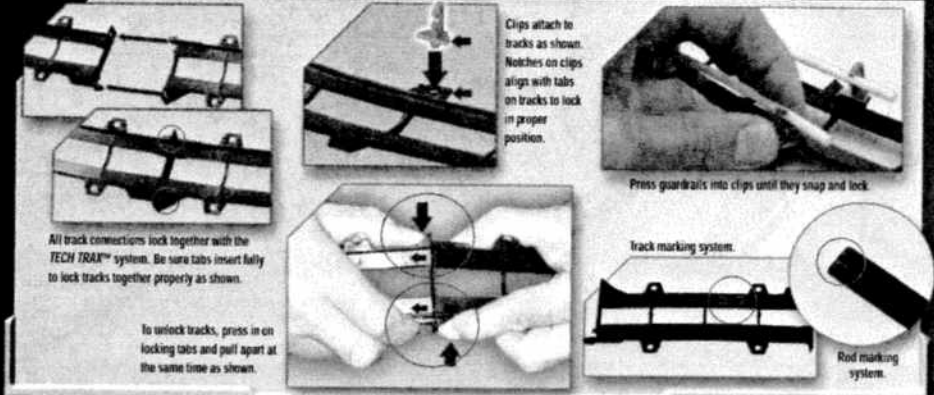


1 START ASSEMBLING

VERTICAL ROD Lid Connector AND TOP LOOP SUPPORT

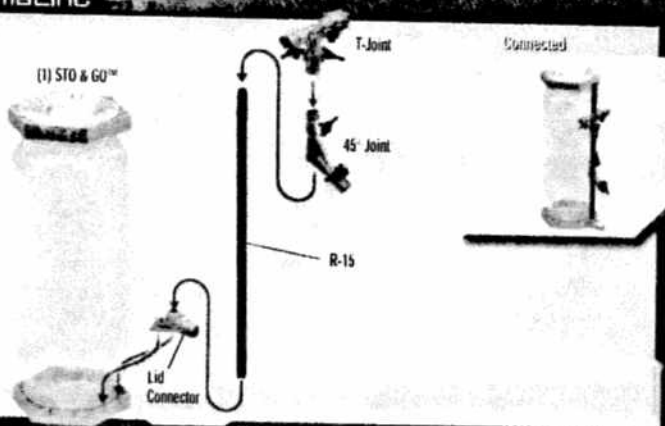

2



TOP Lid CONNECTED

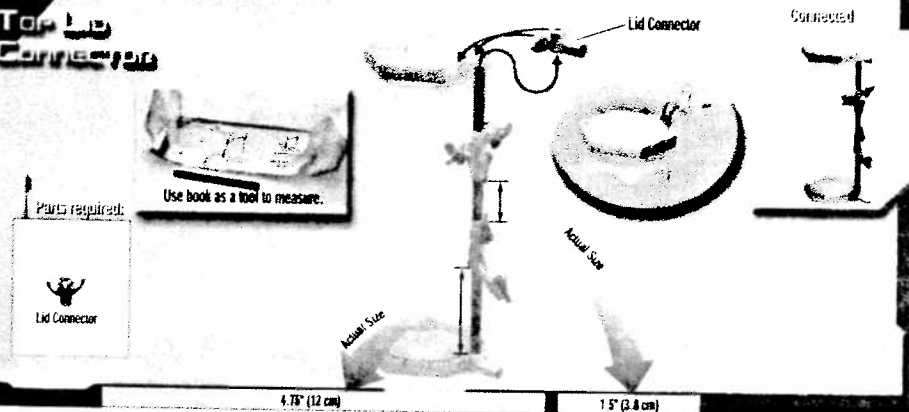

3

CONNECT TRACK

Parts required:

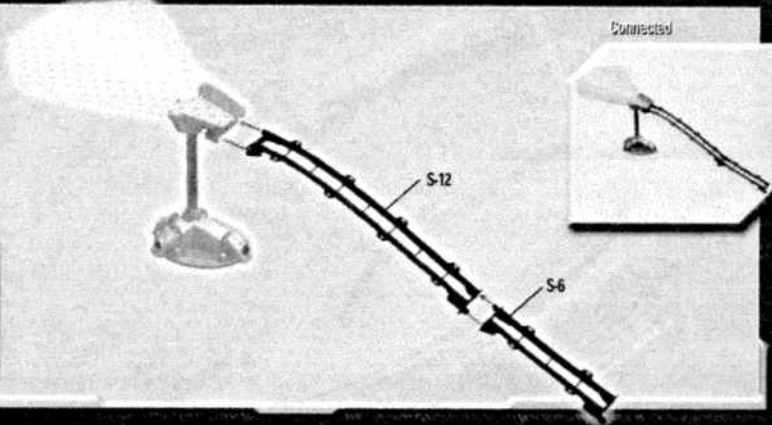



Connected



4

CONNECT SPREAD

Parts required:

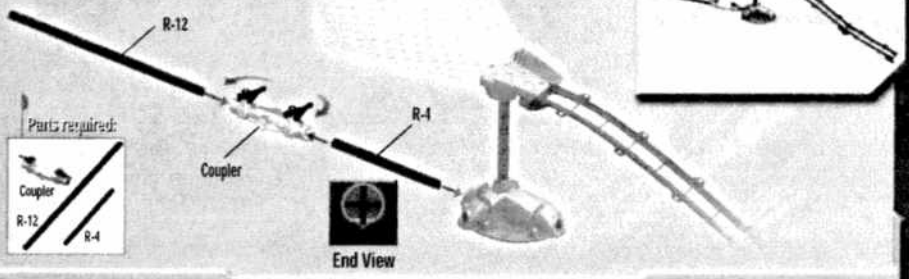

Connected



End View

5

ADD TRACK CONNECTORS




Track Connectors Connect Points

Connected



Snap on two TZPs.

Parts required:



6

RIGHT SIDE TRACKS



Connected



Parts required:



S-9



C-2

S-6

7

Add Tower Support


Parts required:

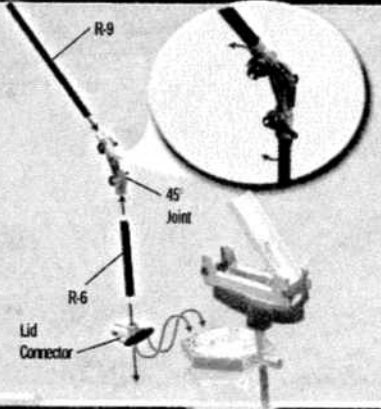

8


Add Top Track

Parts required:



9

CLIPS

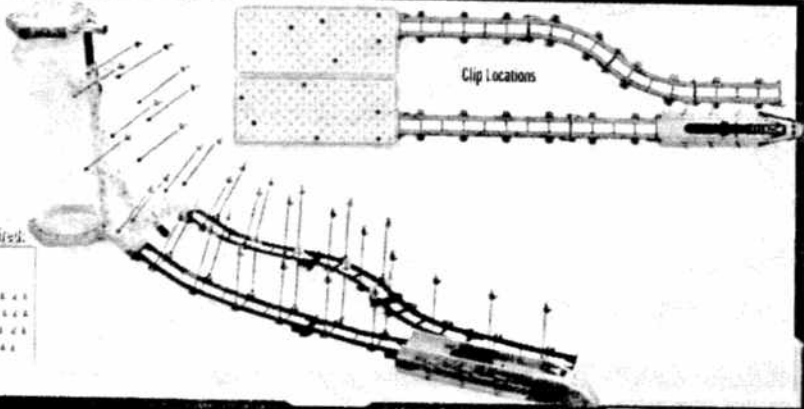


Parts required:

- 30 Clips

10

GUARDRAILS

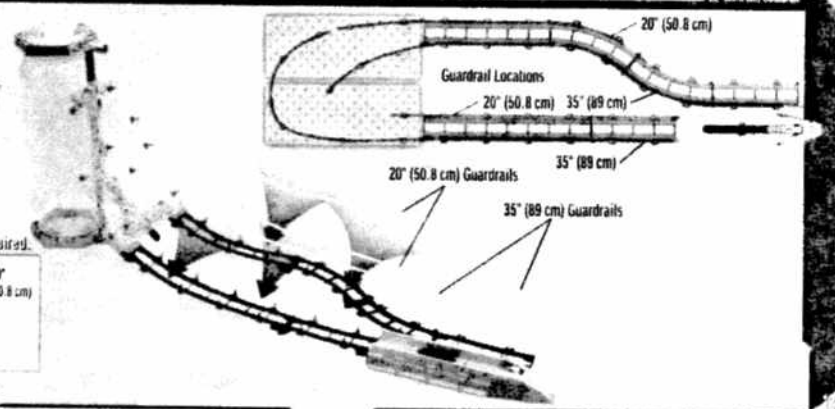

Parts required:



- (2) 20" (50.8 cm)
- (2) 35" (89 cm)

Finished Set



Congratulations!
Your *TECH TRAX™* TRIGGER FLIP™ set is complete.
"You're a *TECH TRAX™* Master."
Now choose your *TECH TRAX™* car,
and you're ready to test your skill!


ALTERNATE LAYOUT

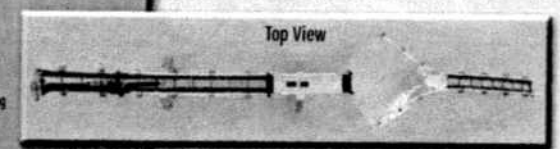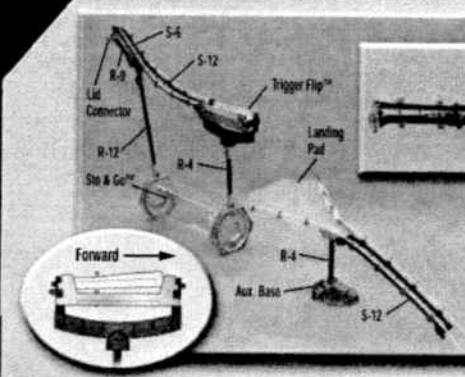

Now that you're a *TECH TRAX™* master
can you also build this set?

READY TO PLAY


HOW TO PLAY

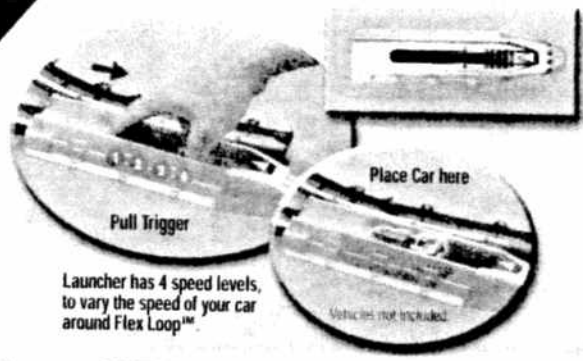

Launcher has 4 speed levels, to vary the speed of your car around Flex Loop™.




1. Pull back cover.
2. Replace rubber band.

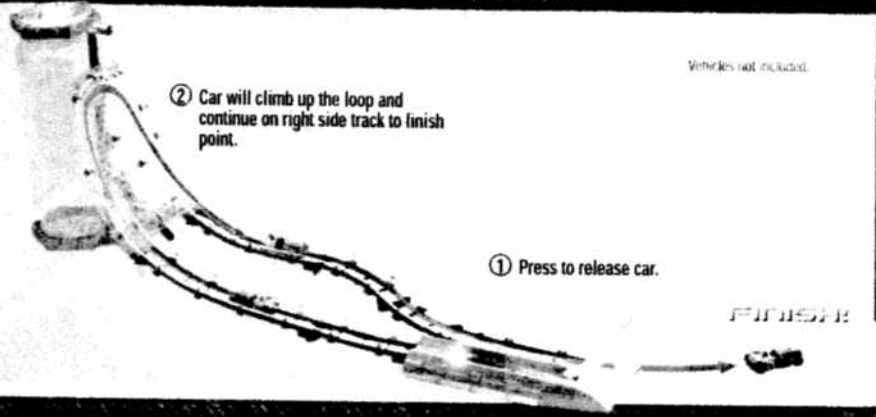

AFTER PLAY TROUBLESHOOTING AND TIPS

STO & GO™

All the pieces of your track set can be easily stored inside the unique STO & GO™ package! Place larger items back in canister first: Panel, Trigger Flip™, Aux. Base, etc.

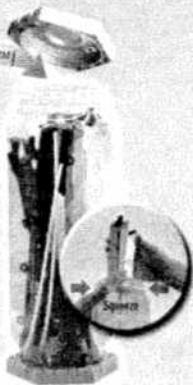

Where guards fit ends, be sure to carefully line the ends, outward, so that it won't impede the vehicle's movement.



The T3F connector can be used as an adaptor for connecting the track pieces of TECH TRACK™ to existing Hot Wheels™ track.



To use the JRL, simply slide it onto one of the rod pieces. (Note: Be sure the "Locking Key" is in the open position.)

Position along the rod where desired, and then turn the Lock Key to lock.



To attach the track, slide the rotating wheel into tracks, and simply slide into the rotating clip slot.



By loosening the Locking Key you can now set the angle of the track as you desire.


To use the 45/90° joints, simply slide a Rod into the open back of the joint, and then close over the upper element. (Note: Be sure the "Joint Key" is rotated into its "open" position.) To lock its position on the rod, rotate the Joint Key 90 degrees.

Fine tuning of the set is required to yield optimum performance.




To remove the track from the Rotating Clip, simply separate its ends outward, and push track out of the groove.

COLLECT AND CONNECT TECH TRAX™ SETS

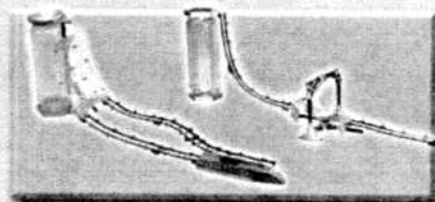

G3736 Flex Loop™
Start Set

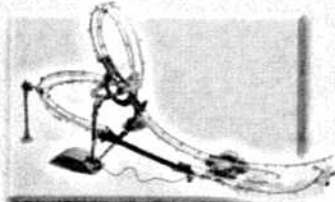

B4629 Crash Chamber™
Start Set

B4682 Power Spring™
Start Set

AVAILABLE CARS:



B4681 Jump Master™



B4682 Turbo Torque™



B4683 Power Pivot™

Each sold separately, subject to availability. Colors and illustrations may vary.




TECH TRAX™

THE ADVANCED CONSTRUCTION SYSTEM FOR ULTIMATE STUNTS



8+

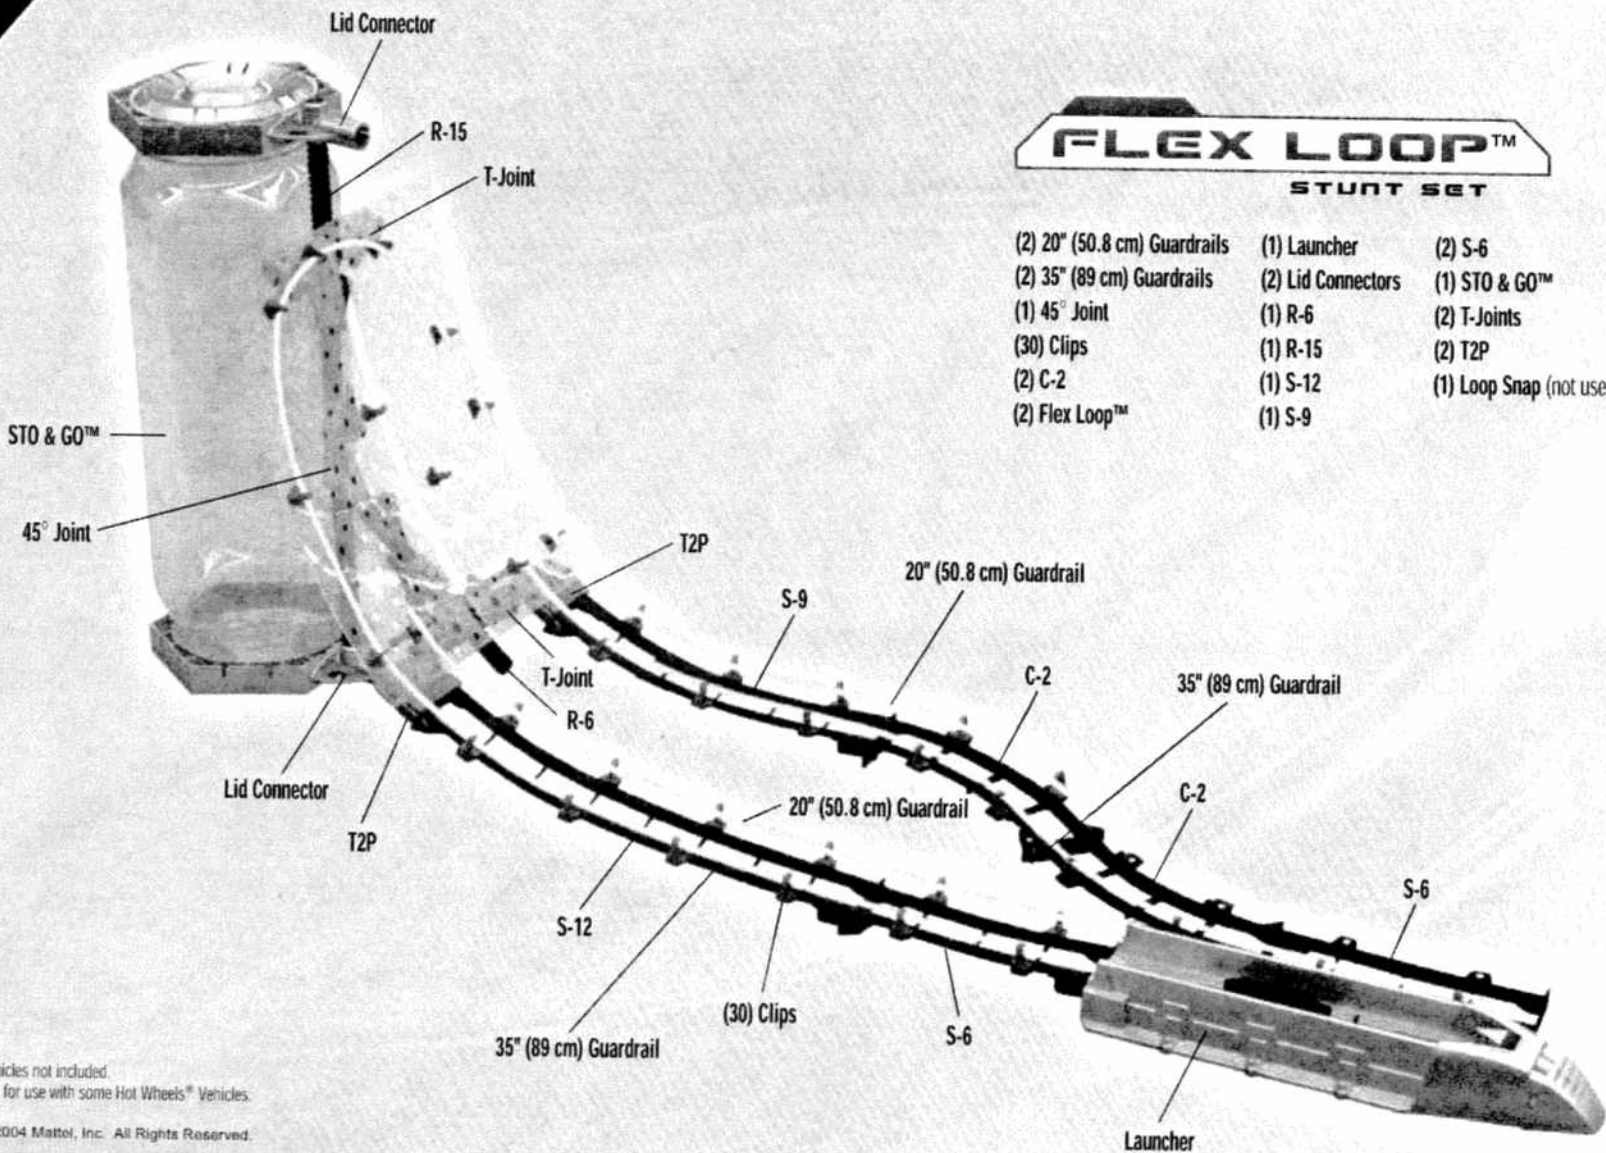

FLEX LOOP™ STUNT SET

- | | | |
|------------------------------|--------------------|--------------------------|
| (2) 20" (50.8 cm) Guardrails | (1) Launcher | (2) S-6 |
| (2) 35" (89 cm) Guardrails | (2) Lid Connectors | (1) STO & GO™ |
| (1) 45° Joint | (1) R-6 | (2) T-Joints |
| (30) Clips | (1) R-15 | (2) T2P |
| (2) C-2 | (1) S-12 | (1) Loop Snap (not used) |
| (2) Flex Loop™ | (1) S-9 | |

Vehicles not included.
Not for use with some Hot Wheels® Vehicles.

© 2004 Mattel, Inc. All Rights Reserved.