

Keep these instructions for future reference as they contain important information.

Adult assembly required.
Can't wait? Shilling assemblies (not included)

[illegible]

REQUIRES:

- Phillips screwdriver (not included) for battery installation
- Two AAA (LR03) **alkaline** batteries (not included).

BATTERY INSTALLATION


Access the battery compartment by loosening the screw in the bottom of the engine and separating the top half of the engine from the bottom half of the engine. Replace the batteries as indicated inside the battery compartment. Re-assemble the halves of the engine and tighten the screw. If the engine begins to malfunction, first check battery installation. You may need to reset the electronics by removing the batteries and reinstalling them. If the engine continues to malfunction or no longer operates, it's time to replace the batteries with fresh batteries.

For longer life, use **alkaline** batteries.

BATTERY SAFETY INFORMATION

In exceptional circumstances batteries may leak fluids that can cause a chemical burn injury or ruin your product. To avoid battery leakage:

- Non-rechargeable batteries are not to be recharged.
- Rechargeable batteries are to be removed from the product before being charged.
- Rechargeable batteries are only to be charged under adult supervision.
- Do not mix alkaline, standard (carbon-zinc), or rechargeable batteries.
- Do not mix old and new batteries.
- Only batteries of the same or equivalent type as recommended are to be used.
- Batteries are to be inserted with the correct polarity (+ and -).
- Exhausted batteries are to be removed from the product.
- The supply terminals are not to be short-circuited.
- Dispose of batteries safely.
- Do not dispose of this product in a fire. The batteries inside may explode or leak.

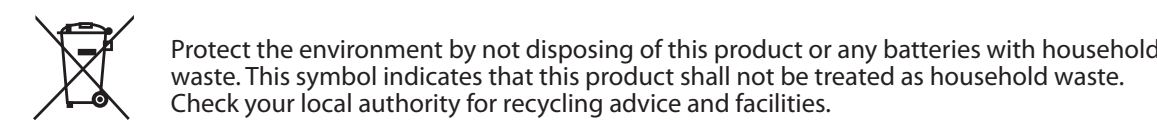

Look for codes on the bottom of each track.

This set includes tracks with a bend so that the engine can climb up and travel down!

Assembly steps marked with a star indicate a permanent assembly. Once these parts are assembled, they can't be taken apart.

8. Attach the two grey vertical supports to the red frame.

9. Attach the red frame to the grey vertical supports.

10. Attach the red frame to the grey vertical supports.

11. Attach the grey frame to the green base.

12. Attach the grey frame to the green base.

13. Attach the grey frame to the green base.

14. Attach the grey frame to the green base.

15. Attach the grey frame to the green base.

Use the switch tracks to change tracks.

Wind Crank in the direction shown until the track loops into place.

Load cargo with the handle up.

Load cargo with the handle up and monkey feet forward. Slide power ON.

Use the switch tracks to change tracks.

Use the switch tracks to change tracks.

Place cargo here.

Load cargo with the handle up.

Some engines may not work on this track set.

1 Oh no! One of the monkeys escaped and one just finished a ride!


2 Whoa! The bridge just dropped and it's steep drop, but Thomas is still chugging along.

3 Cranky's ready to unload a monkey when Thomas passes by.

4

5 Another monkey drops into the cargo car at this underpass.

Parts not used:

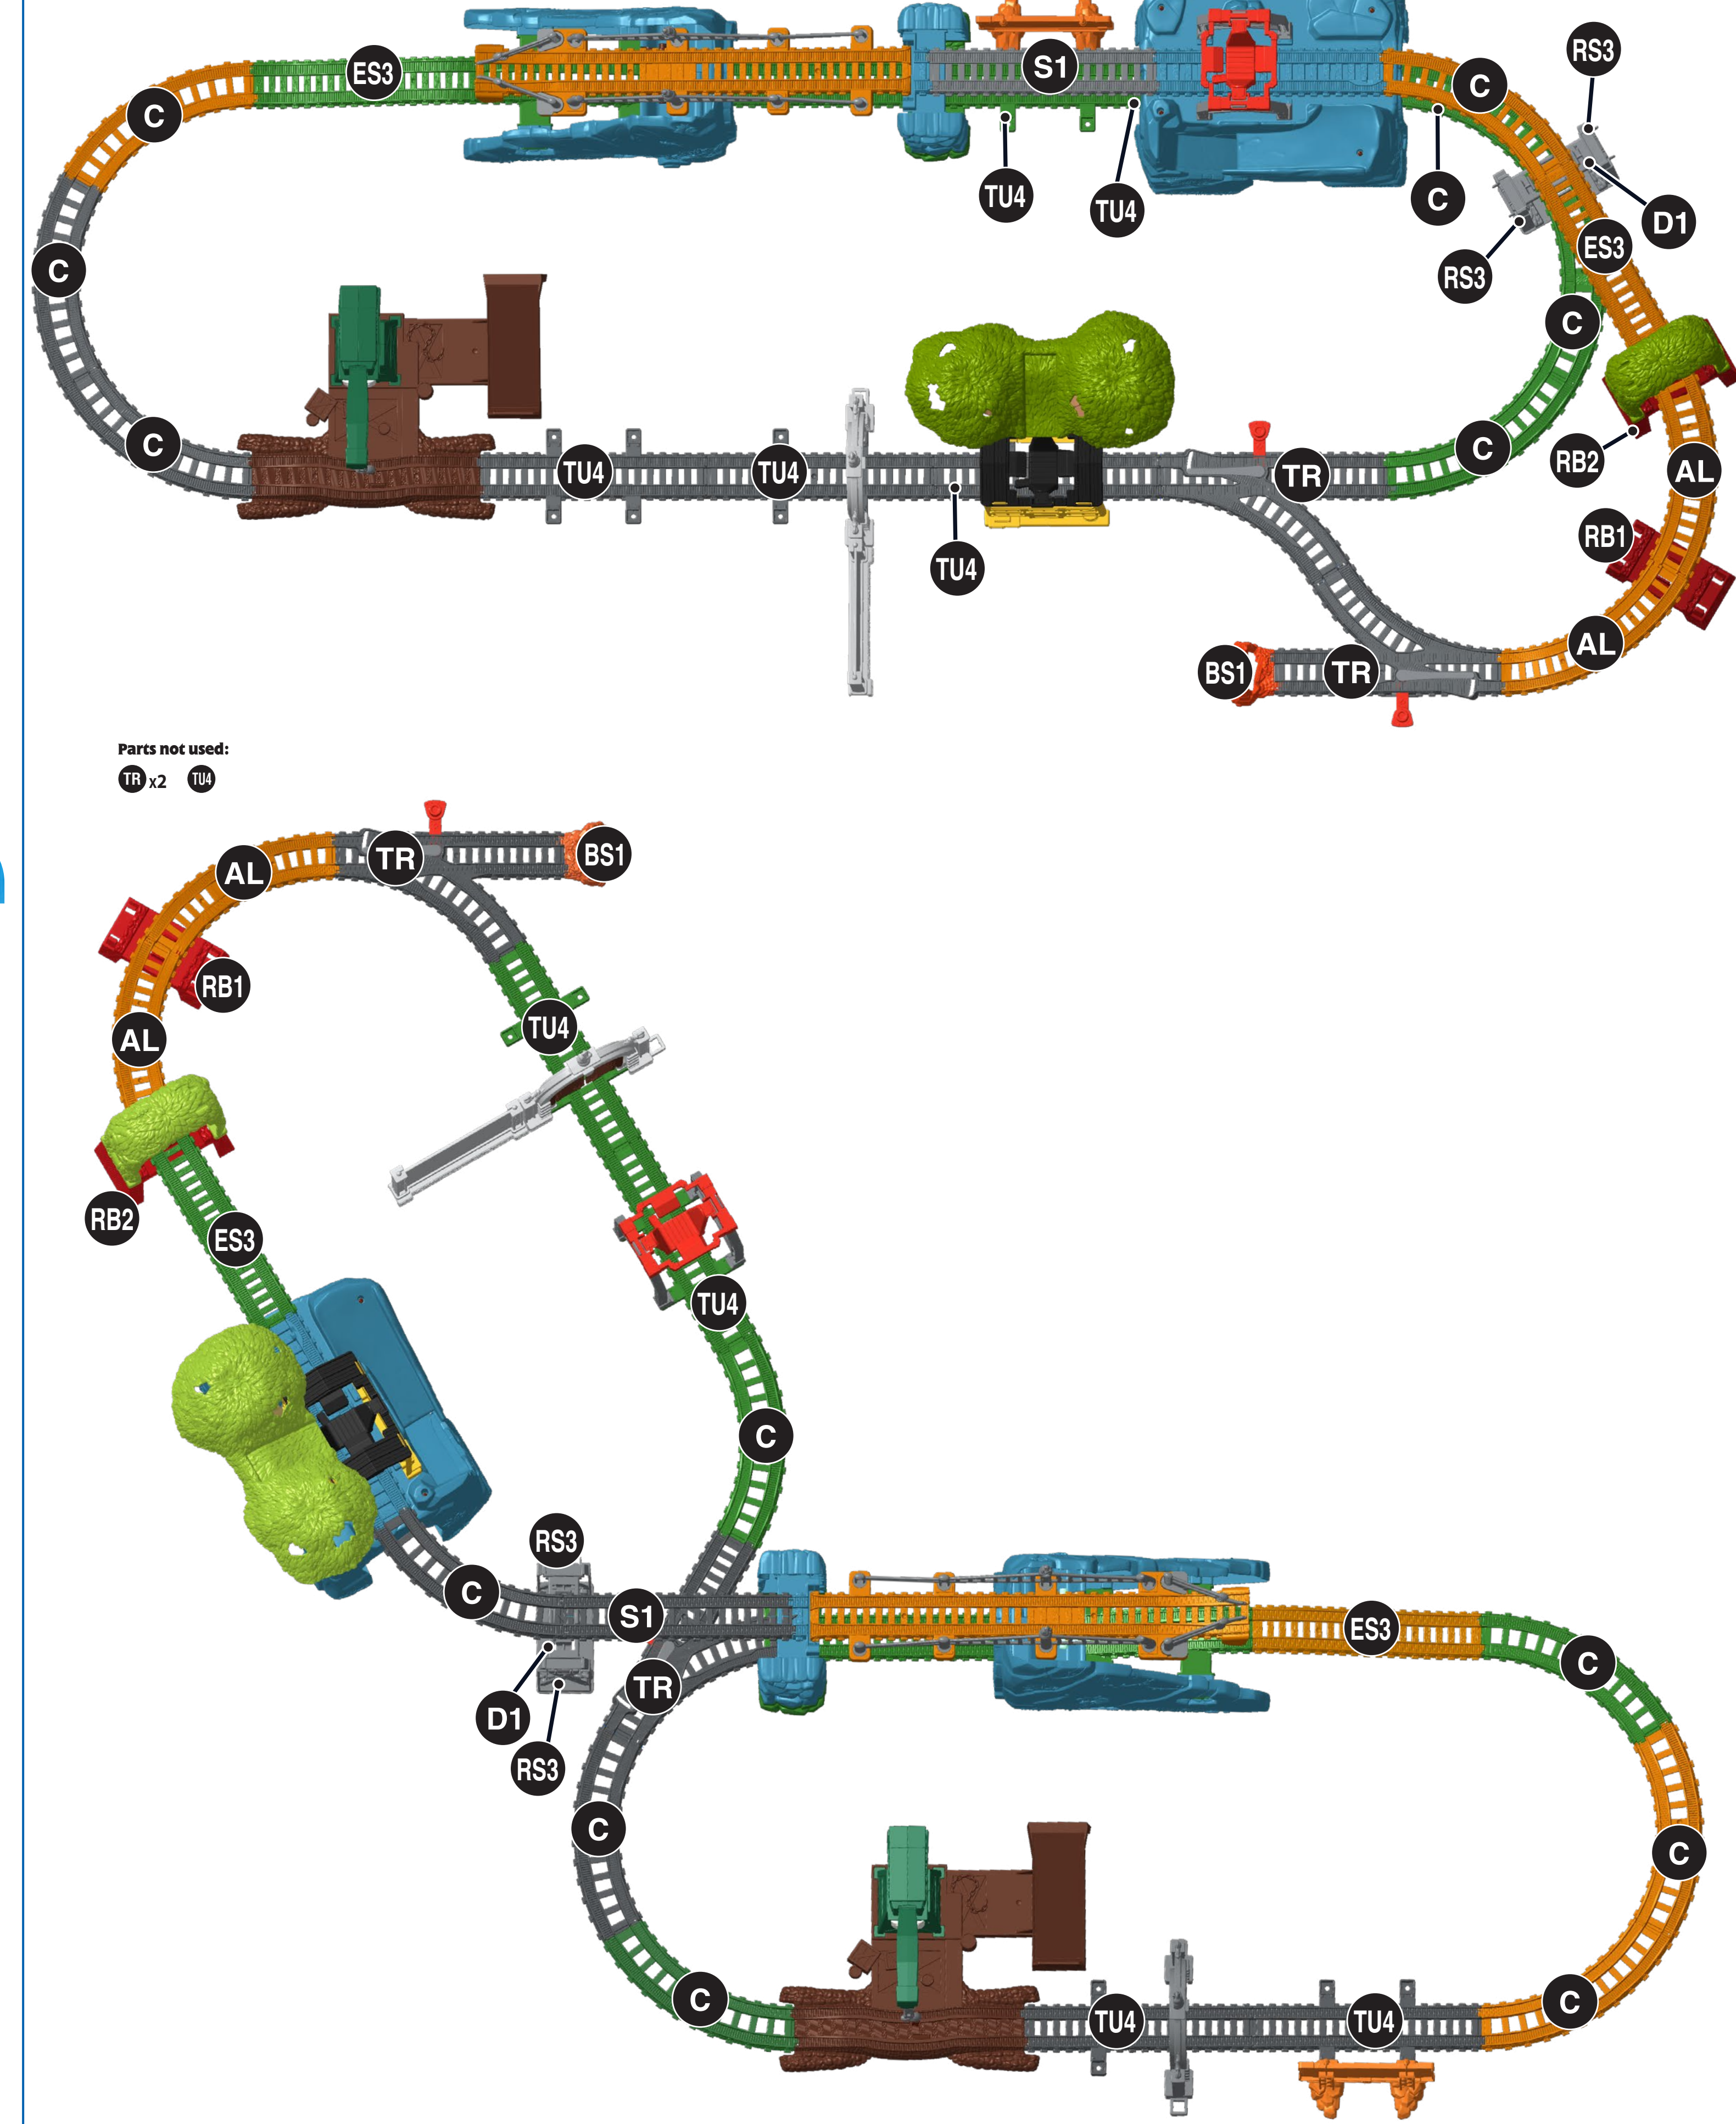

Front


COVER	BACK	3	4
5	6	7	8
9	10	11	12
13	14	15	16

Back

17	18	19	20
21	22	23	24
25	26	27	28
29	30	31	32

Fold

Diagram illustrating the assembly of the calendar. The pages are numbered 1 through 32, with the first page labeled 'COVER' and the last page labeled 'BACK'. The pages are arranged in a zig-zag pattern, showing the sequence of pages when folded. An arrow points to the right, showing the final assembled calendar, which is a small box with 'Cover' and 'Back' labels.

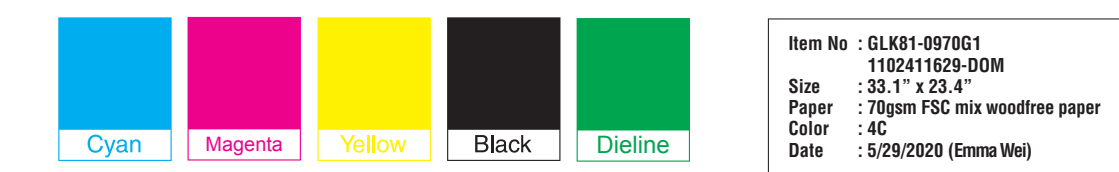

6/29/2020 remark for Q1:
- Updated the image on assembly step 11.