



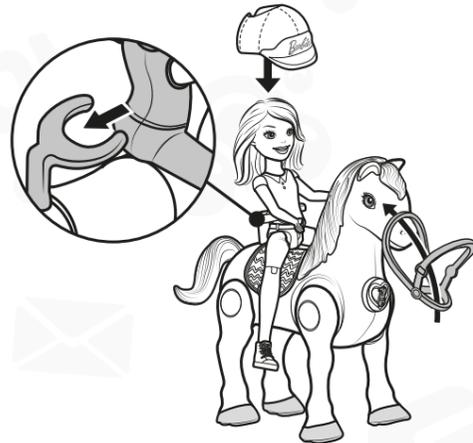


# ASSEMBLY

## Battery Installation



Use a Phillips head screwdriver (not included) to open battery door. Insert 1 AAA (LR03) battery (not included). Do not connect to more than the recommended number of power supplies. Replace battery door and tighten screw. Dispose of battery safely. Replace battery when horse doesn't move. For longer life, use only alkaline battery. When exposed to an electrostatic source, the product may malfunction. To resume normal operation, remove and re-install the battery.




1

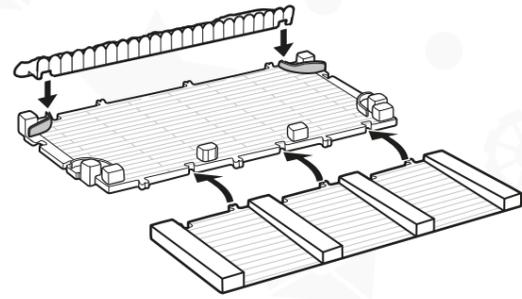


2

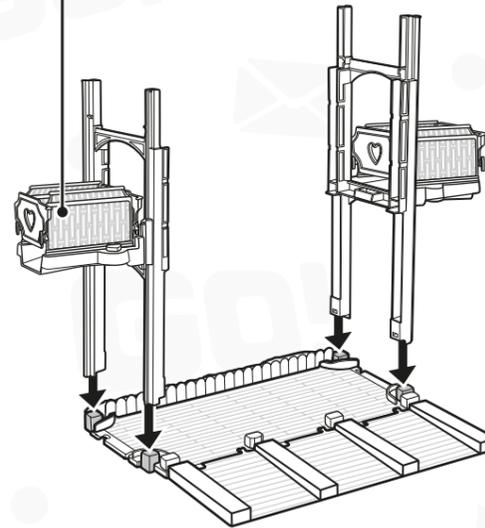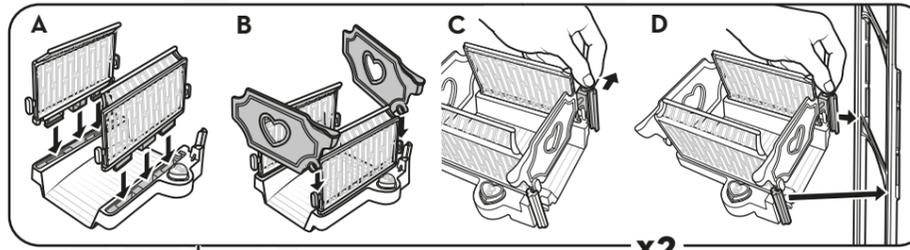


3

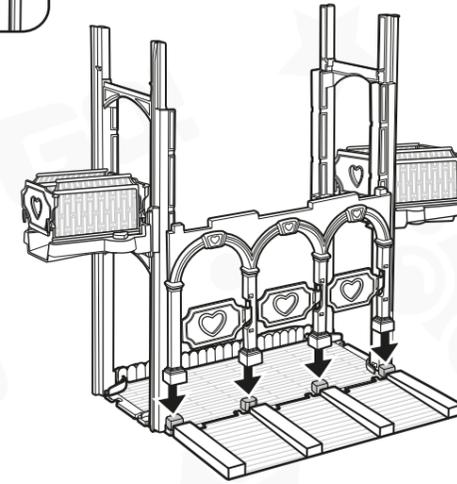


4

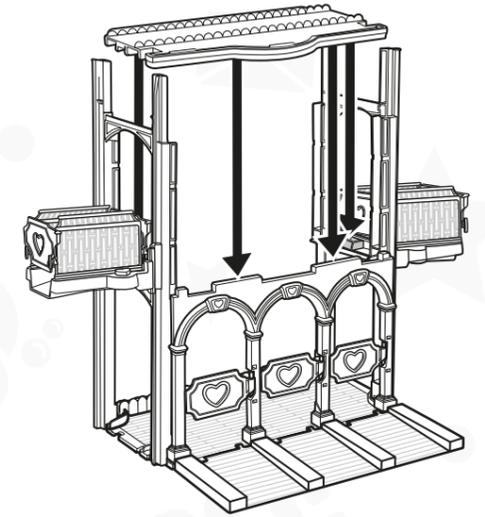


5




6

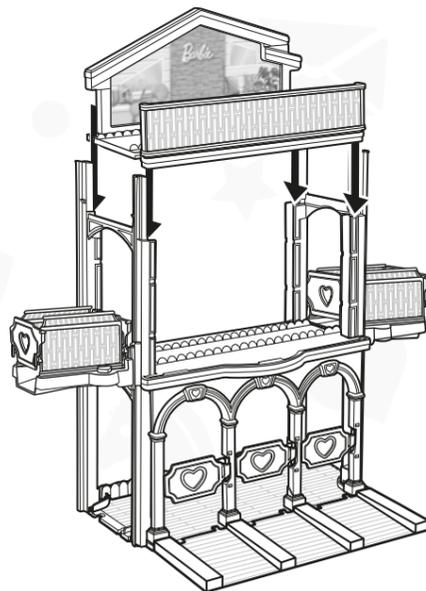

7

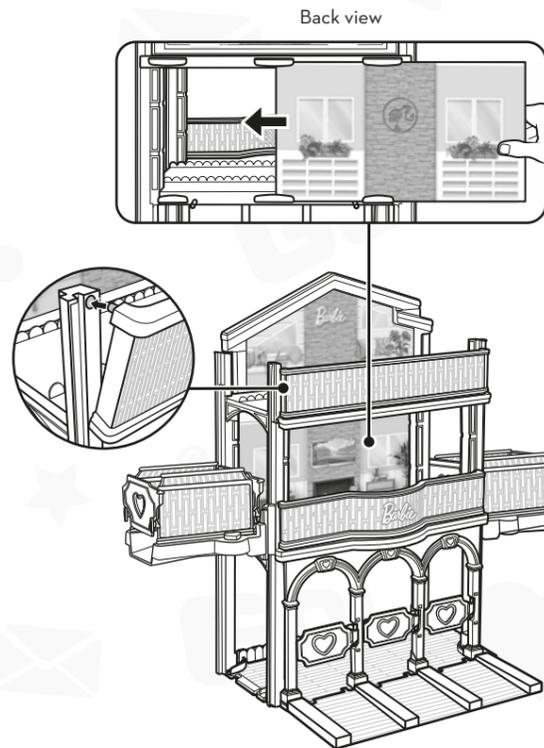

8

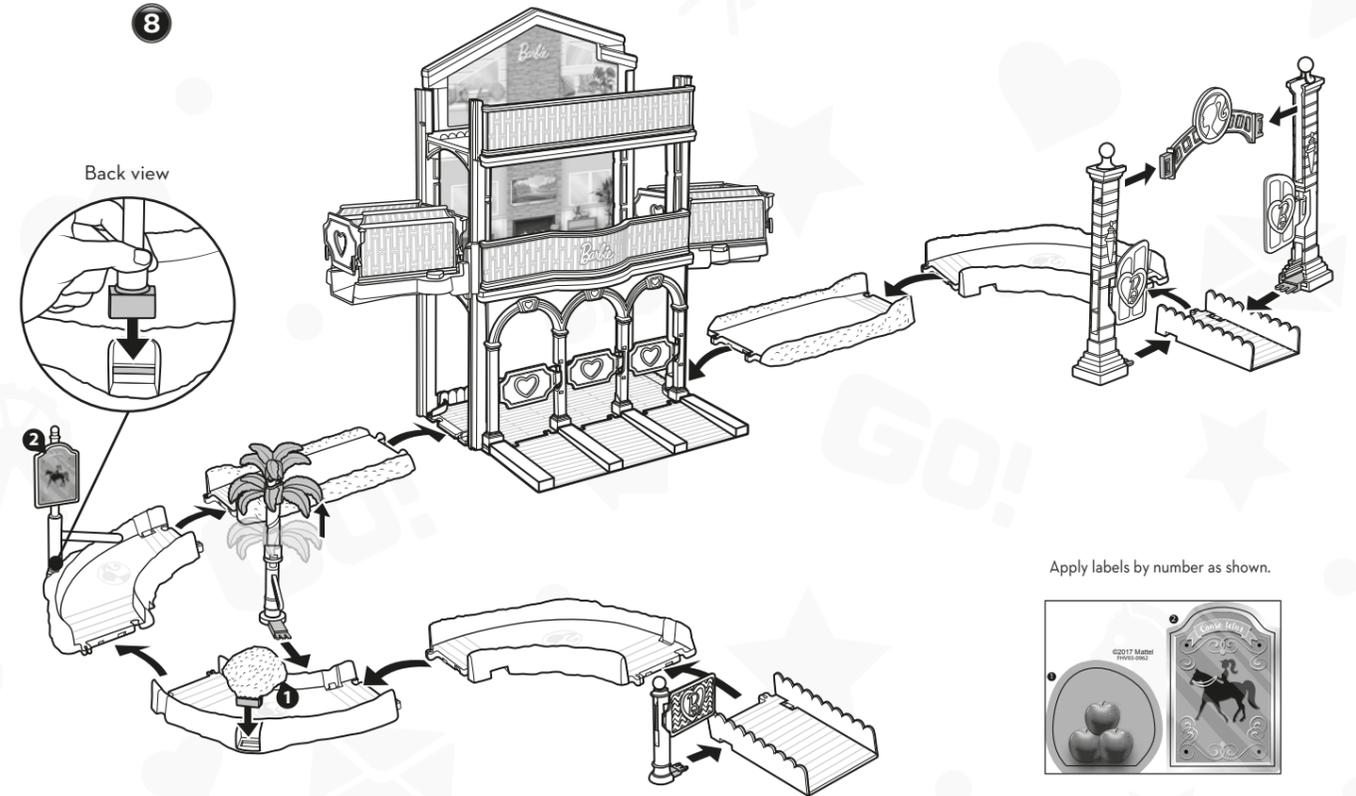

Apply labels by number as shown.

